




製品記号	5BGN						10BGN						10BCN						BBHN						
	呼び径	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価
15	1/2	50.0	126.0	55.0	0.4	42(7×6)	5,520	55.0	126.0	55.0	0.5	35(7×5)	7,870	65.0	43.0	—	0.4	48(12×4)	6,780	56.0	75.0	80.0	0.4	10	9,020
20	3/4	60.0	144.0	55.0	0.6	24(6×4)	7,380	65.0	149.0	70.0	0.7	24(6×4)	11,100	80.0	51.5	—	0.6	32(8×4)	8,550	65.0	79.0	80.0	0.5	8	11,600
25	1	65.0	171.0	80.0	0.9	12(6×2)	10,100	70.0	174.0	80.0	1.0	18(6×3)	15,500	90.0	58.5	—	0.8	16(8×2)	12,400	78.0	83.0	110.0	0.8	8	16,400
32	1 1/4	75.0	206.0	90.0	1.4	12(3×4)	17,300	80.0	215.0	90.0	1.4	12(3×4)	24,000	105.0	67.0	—	1.4	8(4×2)	21,600	86.0	98.0	110.0	1.0	6	24,000
40	1 1/2	85.0	235.0	100.0	1.8	8(2×4)	22,600	90.0	245.0	100.0	1.9	8(2×4)	33,400	120.0	73.5	—	1.9	8(4×2)	26,300	96.0	102.0	110.0	1.5	4	31,600
50	2	95.0	282.0	110.0	2.8	4(2×2)	33,300	100.0	288.0	110.0	2.9	4(2×2)	46,900	140.0	86.0	—	3.0	4(2×2)	42,500	109.0	109.0	140.0	2.3	4	45,800
本体材質	CAC911						CAC911						CAC911						CAC911						
弁体材質	CAC911						CAC911						CAC911						シートPTFE						
最高許容圧力	100℃以下の静流水…0.7MPa 100℃以下の脈動水…0.5MPa						100℃以下の静流水…1.4MPa 100℃以下の脈動水…1.0MPa						100℃以下の静流水…1.4MPa 100℃以下の脈動水…1.0MPa						85℃以下の静流水…1.4MPa 85℃以下の脈動水…1.0MPa						
備考																									



製品記号	10BYN						5BG						10BG						10BS						
	呼び径	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価
15	1/2	91.0	51.0	—	0.4	8	6,350	50.0	126.0	55.0	0.4	42(7×6)	4,420	55.0	126.0	55.0	0.5	35(7×5)	6,310	65.0	93.0	55.0	0.5	36(6×6)	5,750
20	3/4	104.0	59.0	—	0.6	6	8,080	60.0	144.0	55.0	0.6	24(6×4)	5,930	65.0	149.0	70.0	0.7	24(6×4)	8,830	80.0	120.0	80.0	0.7	24(6×4)	7,720
25	1	123.0	72.0	—	0.9	6	11,800	65.0	171.0	80.0	0.9	12(6×2)	8,040	70.0	174.0	80.0	1.0	18(6×3)	12,500	90.0	131.0	90.0	1.0	16(4×4)	10,600
32	1 1/4	141.0	84.0	—	1.4	4	16,700	75.0	206.0	90.0	1.4	12(3×4)	13,600	80.0	215.0	90.0	1.4	12(3×4)	19,000	105.0	152.0	100.0	1.8	6(3×2)	20,100
40	1 1/2	160.0	100.0	—	2.1	4	20,300	85.0	235.0	100.0	1.9	8(2×4)	18,100	90.0	245.0	100.0	1.9	8(2×4)	26,500	120.0	167.0	110.0	2.0	8(2×4)	22,100
50	2	198.0	123.0	—	3.3	2	32,400	95.0	282.0	110.0	2.8	4(2×2)	26,500	100.0	288.0	110.0	3.0	4(2×2)	37,700	140.0	190.0	125.0	3.4	4(1×4)	35,900
65	2 1/2	—	—	—	—	—	—	—	—	—	—	—	—	120.0	376.0	125.0	8.6	1	74,500	—	—	—	—	—	—
本体材質	CAC911						CAC406						CAC406						CAC406						
弁体材質	スクリーンSUS304						CAC406						CAC406						CAC406						
最高許容圧力	85℃以下の静流水…1.4MPa 85℃以下の脈動水…1.0MPa						120℃以下の油、ガス、空気、脈動水…0.5MPa 飽和蒸気…0.2MPa 120℃以下の静流水…0.7MPa						120℃以下の油、ガス、空気、脈動水…1.0MPa 飽和蒸気…0.7MPa 120℃以下の静流水…1.4MPa						120℃以下の油、ガス、空気、脈動水…1.0MPa 飽和蒸気…1.0MPa 120℃以下の静流水…1.4MPa						
備考	●スクリーン：40メッシュ																								

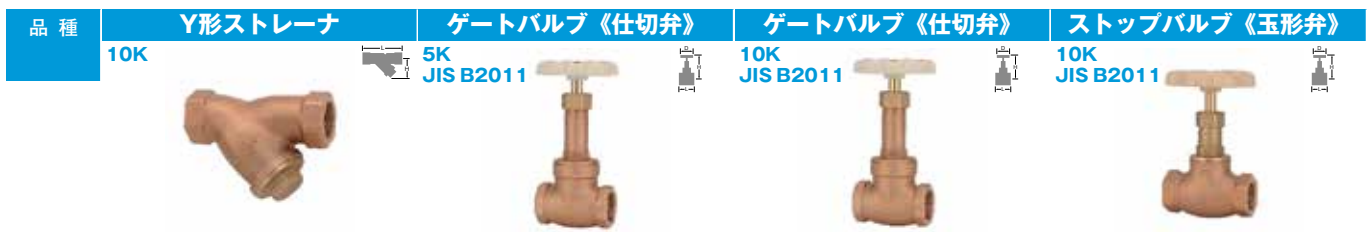

製品記号	10BC						10BY						
	呼び径	L	H	D	W	箱入数	単価	L	H	D	W	箱入数	単価
15	1/2	65.0	43.0	—	0.4	48(12×4)	5,410	80.0	49.0	—	0.4	48(8×6)	4,130
20	3/4	80.0	51.5	—	0.6	32(8×4)	6,860	100.0	57.0	—	0.6	36(6×6)	5,340
25	1	90.0	58.5	—	0.8	16(8×2)	9,850	115.0	70.0	—	0.8	24(6×4)	8,270
32	1 1/4	105.0	67.0	—	1.4	8(4×2)	17,300	135.0	82.0	—	1.2	16(4×4)	12,000
40	1 1/2	120.0	73.5	—	1.9	8(4×2)	21,000	160.0	98.0	—	1.8	8(4×2)	15,000
50	2	140.0	86.0	—	3.0	4(2×2)	34,100	195.0	121.0	—	3.0	4(2×2)	24,900
本体材質	CAC406						CAC						
弁体材質	CAC406						スクリーンSUS304						
最高許容圧力	120℃以下の油、ガス、空気、脈動水…1.0MPa 飽和蒸気…1.0MPa 120℃以下の静流水…1.4MPa						120℃以下の静流水…1.4MPa 飽和蒸気…お問合わせください						
備考	●スクリーン：60° 千鳥打抜きステンレス打抜板 ●スクリーン20~200メッシュも対応致します												